

Angle Check Valve

Non-return valve for backflow prevention.

- Compact design
- Easy to install and operate
- Durable and long service life
- Cracking pressure of 2.9 psi


SPECIFICATIONS

Sizes	3/8" - 2"
Material	SS304
Cracking Pressure	*See chart below
Maximum Operating Pressure	232 psi
Operating Temperature	14 °F - 428 °F
Application	W.O.G



DIMENSIONS

DN	A	B	C	D
10	3/8"	1.81"	1.02"	2.75"
15	1/2"	1.81"	1.02"	2.75"
20	3/4"	1.93"	1.26"	2.99"
25	1"	2.28"	1.57"	3.58"
32	1 1/4"	3.23"	1.93"	4.57"
40	1 1/2"	3.54"	2.17"	4.57"
50	2"	3.66"	2.68"	5.43"

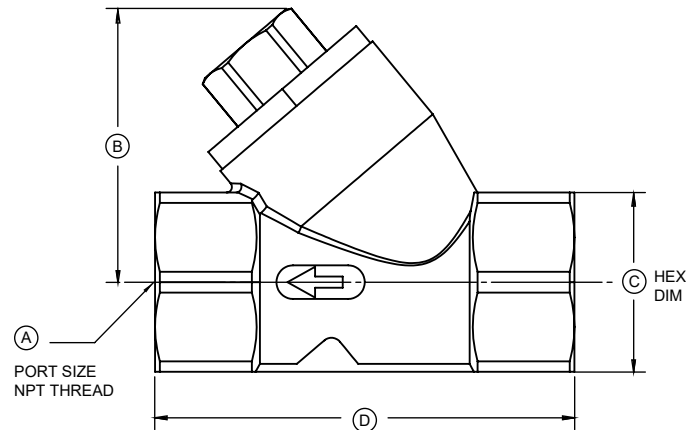

HOW TO ORDER

KAC - **D** - **3** - **N** - **25**

Valve Type	D. Check Valve
Body Material	3. SS304
Connection	N. NPT Thread
DN	10=3/8" 15=1/2" 20=3/4" 25=1" 40=1 1/2" 50=2"

CRACKING PRESSURE

DN	PSI
10	4.35
15	4.35
20	2.9
25	2.9
32	1.45
40	1.45
50	1.45