

# **Model 100SS**

**Kingston Safety Valve** 




### **Features**

- Small Air Systems Valve
- Available Sizes: 1/8" to 1/2" NPT
- Maximum Temperature is -400°F
- Pop-Style Safety Valve for Non-Code Applications
- Precision Machined Hard Seat, 440C Stainless Steel Ball
- Set Pressure Range 5-300 PSIG
- Stainless Steel or Music Wire Depending on Set Pressure
- Tested in National Board Approved Quality Assurance Process

|  | Model | Inlet Size | Orifice | Dimensions (inches) |         | Set Pressure Range | Approx. Shipping Wt. | Max. Temp |
|--|-------|------------|---------|---------------------|---------|--------------------|----------------------|-----------|
|  |       |            |         | Height (A)          | Hex (B) | (PSIG)             | Approxi empping tru  | (°F)      |
|  | 100SS | 1/8" NPT   | 0.125   | 1-1/2"              | 3/4"    | 5-100              | 1 oz.                | 400°F     |
|  |       | 1/4" NPT   | 0.250   | 2-1/2"              |         | 5-300              | 3 oz.                |           |
|  |       | 3/8" NPT   |         |                     |         |                    | 4 oz.                |           |
|  |       | 1/2" NPT   | 0.468   | 3-1/8"              |         |                    | 5 oz.                |           |


### **Materials**


| No. | Part Name   | Materials                  |
|-----|-------------|----------------------------|
| 1   | Base        | Brass                      |
| 2   | Body        | Brass                      |
| 3   | Valve Stem  | Brass                      |
| 4   | Adj. Screw  | Brass                      |
| 5   | Spring      | Stainless Steel/Music Wire |
| 6   | Spring Seat | Brass                      |
| 7   | Lock Nut    | Brass                      |
| 8   | Ball        | Stainless Steel            |

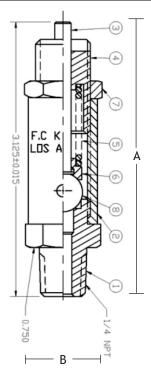


# Kingston Model 100SS Kingston Safety Valve


## **Flow Capacity Information**

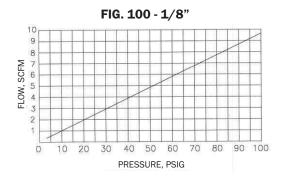



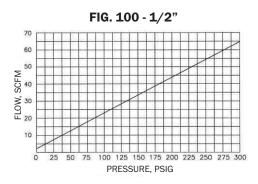

## **Ordering Information**

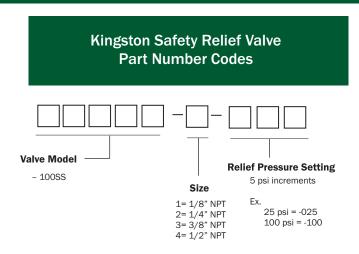

### **Product Notes**

Set pressure can deviate from the marked by ± 2 psig at or below 70 psig set pressures and ± 3% psig above 70 psig.

Factory standard seat tightness for hard seat valves: no audible leakage at 10% below nameplate set. It is normal for spring-operated safety valves to exhibit leakage or simmer/warn, as the system operating pressure approaches the set pressure. For hard seat valves this is typically occurs at pressure at or above 80% of nameplate set pressure.

At very low set pressure (20 psig and below), the ratio of the downward spring force as compared to the upward pressure force is very small. In these cases it may be impossible to achieve seat tightness.

Storm Manufacturing reserves all rights. Product specifications are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

