# **Model 159A**

Kingston Air Pressure Regulator Valve




#### **Features**

- Designed for Rigorous Applications
- Holds Pressure constant Regardless of Flow Variation
- Reinforced Neoprene Diaphragm is High Resistant to Oil, Air, & Moisture to Ensure Long Wear and Hard Use
- All Valves are Supplied with 1/4" Gauge Ports and are Capable of Regulating from Initial Line Pressure of up to 200 PSIG to a Regulated Pressure of 10-150PSIG

	Model	Inlet Size	Outlet Size	Dimensions (inches)			Regulated Pressure	Approx.	Min. Temp	Max. Temp
l				Height (A)	Thickness (B)	) Width (C)	Range (PSIG)	Shipping Wt.	(°F)	(° <b>F</b> )
	159A	3/4" NPT	3/4" NPT	5-15/16"	3"	3"	10-150	2 lb. 2 oz.	-40° F	225°F


#### **Materials**

No.	Part Name	Materials
1	Base	Brass
2	Cover	Brass
3	Adj. Screw	Brass
4	Cap	Brass
5	Adj. Screw Seat	Brass
6	Plunger	Brass
7	Valve	Brass
8	Spring Seat	Aluminum
9	Screw (Cover)	Mild Steel
10	Disc (Valve)	Buna "N"
11	Disc Screw (Valve)	Brass
12	Spring (Large)	Oil Tempered Spring Wire
13	Spring (Small)	Stainless Steel
14	Diaphragm	C.I. Neoprene
15	Lock Nut	Brass

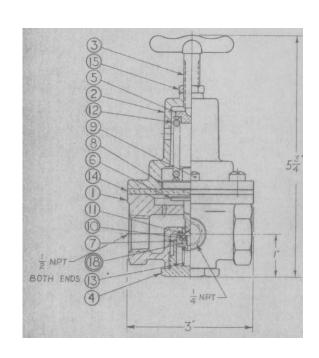


# Kingston Model 159A Air Pressure Regulator Valve

### **Flow Capacity Information**

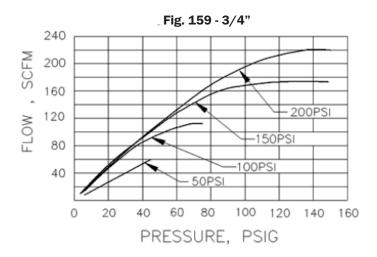

#### **Ordering Information**

## Kingston Air Compressor Valves Part Number Codes

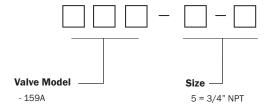

#### **Product Notes**

Storm Manufacturing reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

