# **Model 226**

**Kingston Vertical Check Valve** 




### **Features**

- 1/8", Plugged Unloader Port, Standard
- Designed for Lubricated or Non-Lubricated Air Compressors
- Designed Specifically for Use in Vertical Pipe Lines
- Stainless Steel or Music Wire Depending on Set Pressure
- Temperature Range is -250°F to 350°F
- Sizes Available from 1/4" to 3/4" NPT

Model	Inlet Size	Outlet Size	Dimension Height (A)	s (inches) Hex (B)	Set Pressure Range (PSIG)	Min. Temp (°F)	Max. Temp
226	1/4" NPT	1/4" NPT	2-1/32" 2-7/16"	7/8" 1-1/16" 1/2"	1-400	- 40° F	225°F
	3/8" NPT	3/8" NPT	2-1/2"				
			2-3/32"			-40°F	225°F
	1/2" NPT	1/2" NPT	2-5/32"			101	220 1
			2-17/32"			-250F	350°F
	3/4" NPT	3/4" NPT	2-3/4"				
			3-3/16"	1-5/16"			

### **Materials**

No.	Part Name	Materials
1	Body	Brass
2	Bushing	Brass
3	Spring Seat	Brass
4	Snap Ring	Carbon Steel
5	Disc	Teflon
6	Spring	Stainless Steel

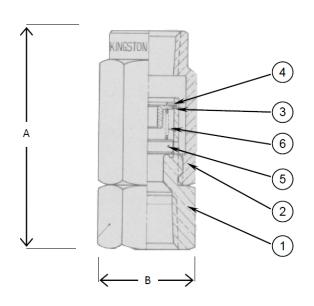

## Kingston Model 226 Vertical Check Valve

### **Flow Capacity Information**

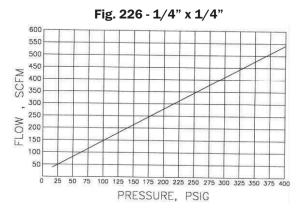
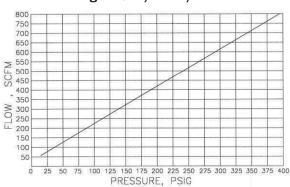


Fig. 226 - 1/2" x 1/2"





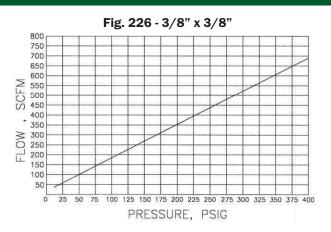


Fig. 226 - 3/4" x 3/4"

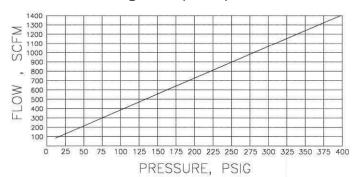

### **Ordering Information**

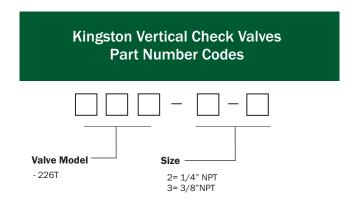

#### **Product Notes**

All Kingston Check Valves are manufactured under a quality control system approved by the National Board of Boiler and Pressure Vessel inspectors.

Storm Manufacturing Group, Inc. reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

