Model 227

Kingston Vertical Check Valve




Features

- Designed for Lubricated or Non-Lubricated Air Compressors
- Designed Specifically for Use in Vertical Pipe lines
- Temperature Range is -40°F to 225°F
- Maximum Operating Pressure is 300 PSIG


Model	Inlet Size	Outlet Size	Dimension: (Height)	s (inches) (Hex)	Cracking Pressure (PSI)	Approx. Shipping Wt.	Min. Temp (°F)	Max. Temp (°F)
227	1/4" MPT	1/4" FPT	1-27/32"	5/8"	1.252	2 oz.	- 40°F	225° F

Materials


No.	Part Name	Materials
1	Body	Brass
2	Bushing	Brass
3	Disc Cage	Brass
4	Disc	Buna-N
5	Spring	Stainless Steel

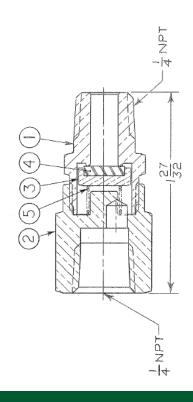

Flow Capacity Information

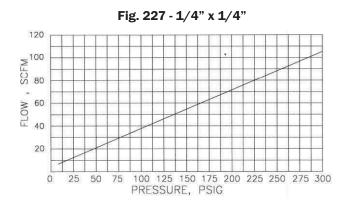

Ordering Information

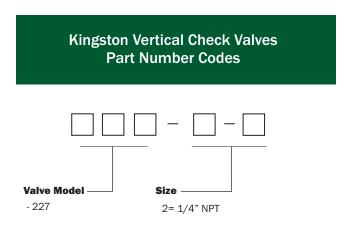

Product Notes

All Kingston Check Valves are manufactured under a quality control system approved by the National Board of Boiler and Pressure Vessel inspectors.

Storm Manufacturing Group, Inc. reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

