



KINGSTON

Manufacturing reliable industrial valves for industry since 1908.

251-30

Control Valve

Model 251-30

Kingston Quick Opening Industrial Flow Control Valve




Features

- Constructed Brass Body with Stainless Steel Internal Component
- 30° Angle Eliminates the Cost and Labor Required to Attach an Additional Fitting
- Maximum Operating Pressure is 1200 PSIG
- Repair Kit Available: 251-30-KIT

Model	Inlet Size	Outlet Size	Inlet Orifice	Dimensions (inches)		Pressure Range (PSIG)	Approx. Shipping Wt.	Min. Temp (°F)	Max. Temp (°F)
				Height (A)	Width (B)				
251-30	1/4" NPT	1/4" NPT	0.314	2-3/125"	2-1/8"	25-1000	10.5 oz	-40°F	228°F

Materials

No.	Part Name	Materials
1	Body	Brass CSTG
2	Stem Assembly	Stainless Steel
3	Cap	Brass ASTM-B16
4	Spring	Stainless Steel
5	"O" Ring	Buna "N"
6	Lever	Steel
7	Shoulder Pin	Stainless Steel
8	Retaining Ring	Stainless Steel

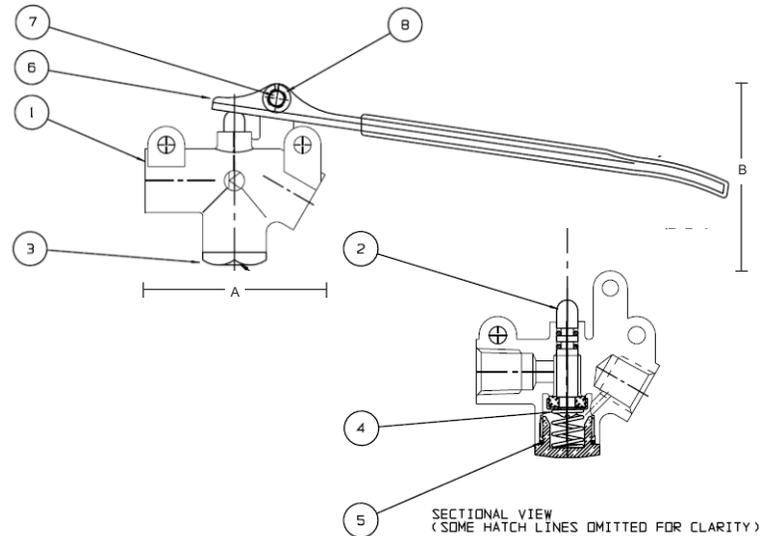

Kingston Model 251-30 Quick Opening Industrial Flow Control Valve

Flow Capacity Information

Fig. 251-30 - 1/4"


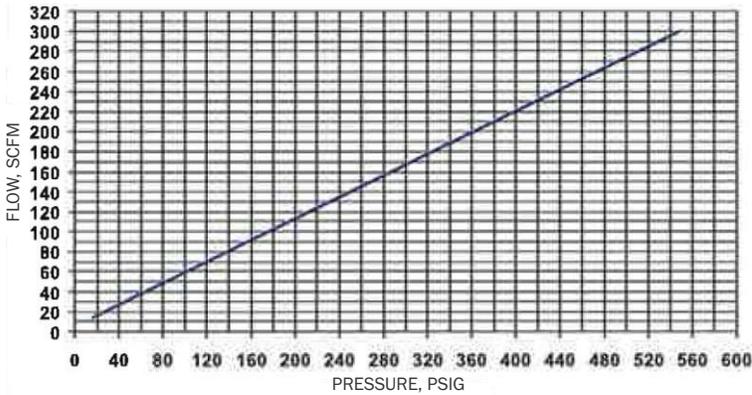


Fig. 251-30 - 1/4"



Ordering Information

Kingston Control Valves Part Number Codes

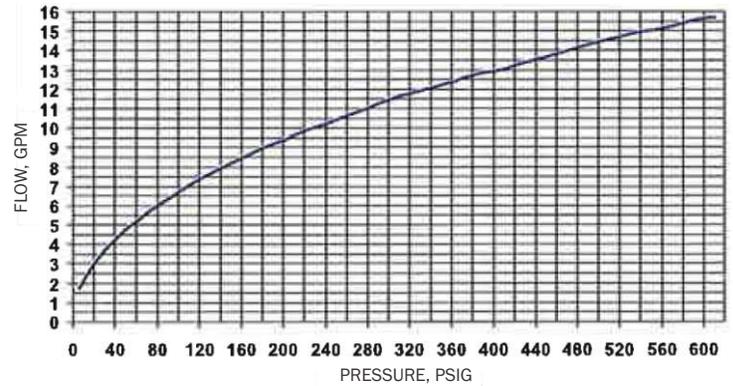

Valve Model

- 251-30

*O-Rings not available in Teflon

Product Notes

Storm Manufacturing reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.



www.KingstonValves.com
KINGSTON

Copyright 2016 © Storm Manufacturing Group. All rights reserved. Product designs and specifications subject to change without notice.03.25130.16.r1