

Model 253

Quick Opening Industrial Flow Control Valve



Features


- Designed for Liquid, Compressed Air, or Gas Applications
- Developed for Use in Car Wash Systems and Other Operations Requiring a Fixed Position Control Valve
- Often Used for Wheel or Tire Cleaning Solutions in Car Wash Systems
- Available with Mounting Stud and Nut Option
- Valve Stem Contains Electroless Nickel Plated for Long Wear in Harsh Solutions
- Available with 3" or 5" Brass Steel Lever Options
- Alternative Discs and Seals May Be Available. Please Call for Details

	Model	Inlet Size	Outlet Size	Dimensions (inches)		Approx. Shipping Wt.	Min. Temp	Max. Temp
				Height (A)	Width (B)		(°F)	(°F)
	253	1/4" NPT	1/4" NPT	1-25/32"	2-13/16"	5 - 7 oz.	-40°F	225°F
	255			2-9/16" (with Stud & Nut)				

^{*}Note: Not Intended to be used with "air blow" or "cleaning guns"


Materials


Part Name	Materials		
Body	Brass		
Lever	Brass		
Сар	Brass		
Stem	Brass		
Roll Pin	Carbon Steel		
Locknut	Carbon Steel		
"O" Ring	Buna "N"		
Screw	Brass		
Disc	Buna "N"		
Cage	Brass		
Spring	Stainless Steel		
	Body Lever Cap Stem Roll Pin Locknut "O" Ring Screw Disc Cage		

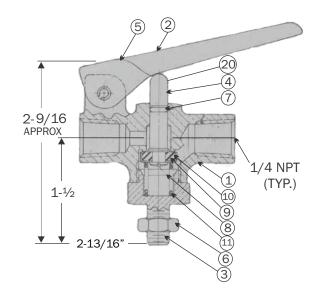


Kingston Model 253 Quick Opening Industrial Flow Control Valve

Flow Capacity Information

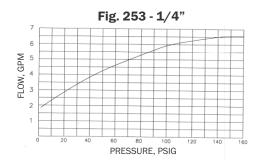

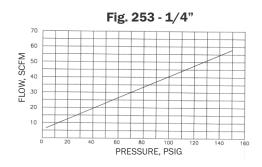

Ordering Information

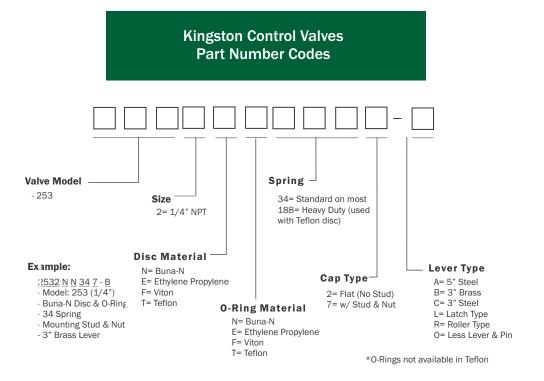

Product Notes

Storm Manufacturing reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

