

# Model 301AC

# Kingston Pneumatic Control Valve




### Features

- Pneumatic Control Valve for Operating Single Acting Cylinders, Rams, Lifts, etc..
- Constructed from Cast Brass with Stainless Steel
  Springs
- Equipped with a "Dead Man" Control Lever
- Air Control is Achieved by Moving Lever to Inlet or Exhaust Stems
- Maximum Operating Pressure is 200 PSIG
- Available in Sizes 1/4" NPT


Model	Dimensions (inches)		Pressure Range	Approx. Shipping Wt.
	Height (A)	Width (B)	(PSIG)	Approx. Shipping Wt.
301AC-2	7"	4-3/8"	10-200	1 lb. 13 oz.

#### **Materials**


No.	Part Name	Materials
1	"O" Ring	Buna "N"
2	Stem	Brass
3	Disc	Buna "N"
4	Body	Brass
5	Сар	Brass
6	Spring	Stainless Steel
7	Stem Nut	Brass
8	Cage	Brass
9	Lever	Brass
10	Lever Pin	Steel
11	Snap Ring	Carbon Steel

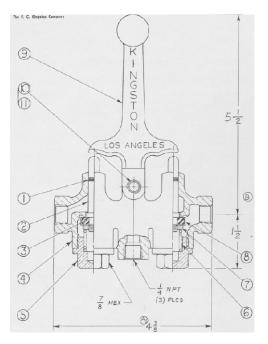

# **Flow Capacity Information**

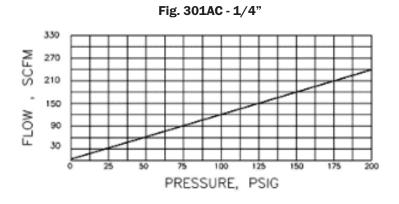

#### **Ordering Information**

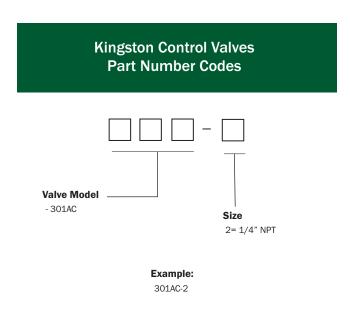

## **Product Notes**

Storm Manufacturing reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

