

Model 302-4

Kingston Locking Hoist Control Valve




Features

- Designed to Operate Various Lifting Devices Utilizing Compressed Air (or Oil) as a Power Source
- · Constructed from Heavy Cast Brass
- Internal Components of Precision Machined Brass Bar Stock, Stainless Steel Springs, Stainless Steel Inlet Screen, and Buna-N Seals
- Features a "Locking" Style Lever
- Widely Used on Automobile, Truck Hoists, and Spring Loaded Single Acting Cylinders

Model	Dimensions (inches)		Pressure Range	Approx. Shipping Wt.
	Height (A)	Width (B)	(PSIG)	Approx. Shipping Wt.
302-4	6-5/8"	4-3/4"	10-200	2 lb. 1 oz.


Materials

No.	Part Name	Materials
1	Body	Brass
2	Cap	Brass
3	Spring	Stainless Steel
4	Lever	Stainless Steel
5	Pin	Leaded Steel
6	Snap Ring	Carbon Steel
7	Rocker Arm	Stainless Steel
10	Disc	Buna "N"
11	Disc Cage	Brass
12	Stem	Brass
13	Stem Nut	Brass
14	Stem Assembly, Item No. 10, 11, 1	12, 13, & 15
15	Screen "O" Ring	Stainless Steel Buna "N"

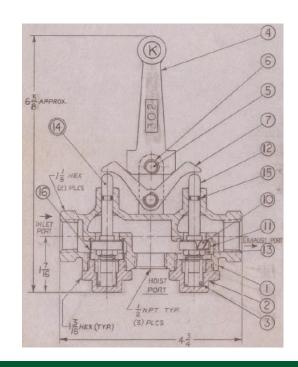


Kingston Model 302-4 Control Valve

Flow Capacity Information

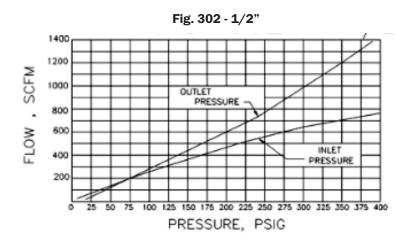

Ordering Information

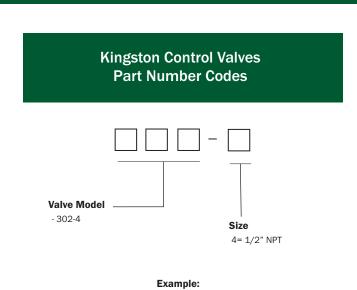

302-4

Product Notes

Storm Manufacturing reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

